




Product Lens

a materials health assessment

COMPANY AND PRODUCT INFO

Issued to	Belden
Description	Security / Communication Cable, Plenum Stranded Bare Copper Conductors, 18AWG 2 to 4 Pairs, Individually Shielded
For the Products	6341PCxxx, 6342PCxxx, 6343PCxxx
Certification Period	April 2017- April 2019
Assessor	MBDC basis methodology v3.1*

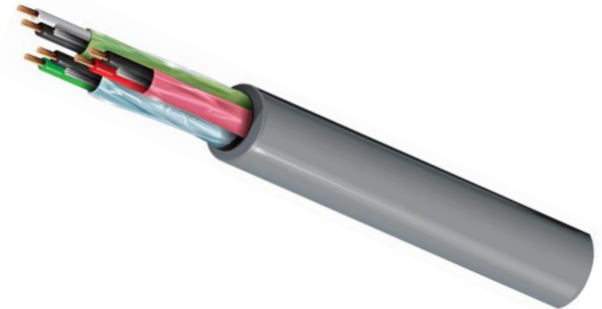

Qualifications

- LEED BPDO Credit: Material Ingredients Option 1 Qualifies for as 1 product
- LEED BPDO Credit: Material Ingredients Option 2 Qualifies for 100% of cost

Other Achievements



MATERIALS / INGREDIENTS INFORMATION

Disclosure Level: 100 ppm 1000 ppm

The following table represents the top 90% of the material ingredient disclosure and ratings. For the full ingredient disclosure information, please see the table on the reverse side.

Materials	Result			
	Supply Chain/ MFG	Install	Use	End of Use
Tinned Copper				
FEP	I,D			I,D
PVC	I,D			I,D
Flame Retardant				
PET				
Plasticizer				
Aluminum				
Proprietary	I,D			I,D
Proprietary				

Exposure Indicator

D = Dermal, Skin
I = Inhalation, air
O = Oral, mouth

*No Indicator means no potential exposure scenario identified

Color Ratings

	Low or mild hazard identified and/or potential exposure
	Moderate hazard identified and/or potential exposure
	Problematic concern found. The combination of the hazard and potential exposure leads to some caution for some uses and/or applications.
	Cannot be fully assessed due to either lack of complete formulation, or lack of toxicological information for one or more ingredients.
	Highly problematic material containing one or more chemicals classified as CMR and having a plausible route of exposure.

Go to ul.com/spg to view the full, detailed materials ingredient list

www.belden.com

Sustainability@belden.com

1-800-BELDEN1



*Methodology based on Cradle to Cradle Certified™ Product Material Health Assessment Methodology v3.1



CERTIFIED

PRODUCT LENS MATERIALS
TRANSPARENCY AND
DISCLOSURE
VIEW SPECIFIC INGREDIENTS
AND EVALUATIONS:
UL.COM/PL

Product Lens

a materials health assessment

Material	CAS Number	Role	%	MFG	Install	Use	End of Use	Comment
Tinned Copper		Conductor	56-61					Highly toxic to aquatic organisms; however, this material is acceptable for use in all phases due to limited exposure opportunity to biosphere
FEP	25067-11-2	Insulation/ Colorant	14-17	I.D			I.D	Lifecycle concerns around use of halogenated polymers.
PVC	9002-86-2	Jacket	7-8	I.D			I.D	Lifecycle concerns around use of halogenated polymers.
Flame Retardant	Proprietary	Jacket	5-5.5					Some chronic toxicity concerns, but little risk as used in this product.
PET	25038-59-9	Tape/ Ripcord	2.5-3.0					Little to no risk across all product phases
Plasticizer	Proprietary	Jacket	2.5-3.0					Acceptable for use in all product phases
Aluminum	7429-90-5	Tape	1.8-2.2					Some neurotoxicity concerns, but little risk as used in this product
Proprietary	Proprietary	Jacket	0.6-0.9	I.D			I.D	Lifecycle concerns around use of halogenated polymers.
Proprietary	Proprietary	Jacket	0.6-0.8					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	0.2-0.3					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	0.2-0.3					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	0.2-0.3					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	0.1-0.15	D				Severe damage to eyes possible during manufacturing phase; little to no risk across all other phases.
Adhesive	Proprietary	Tape	0.1-0.15	I.D				Contains monomer which is a strong sensitizer of the skin and airways and a CMR. However, the risk is acceptable in the other phases after the adhesive is fully cured.
Proprietary	Proprietary	Jacket	0.1-0.15					High aquatic toxicity so care should be taken to keep this substance out of the environment
Proprietary	Proprietary	Jacket	<0.1					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	<0.1					Suspected human carcinogen -(CA Prop 65, IARC Group 2B, MAK Group 2)
Proprietary	Proprietary	Jacket	<0.1					Little to no risk across all product phases
Adhesive	Proprietary	Tape	<0.1	D				Strong eye irritant. Care should be used during manufacture but once adhesive is fully reacted should be low risk in remaining product phases
Proprietary	Proprietary	Jacket	<0.05					Little to no risk across all product phases
Proprietary	Proprietary	Jacket	<0.05					Little to no risk across all product phases
Proprietary	Proprietary	Colorant	<0.05					Little to no risk across all product phases

	Low or mild hazard identified and/or potential exposure
	Moderate hazard identified and/or potential exposure
	Problematic concern found. The combination of the hazard and potential exposure leads to some caution for some uses and/or applications.
	Cannot be fully assessed due to either lack of complete formulation, or lack of toxicological information for one or more ingredients.
	Highly problematic material containing one or more chemicals classified as CMR and having a plausible route of exposure.

